
mfusion Datasheet / 1



mfusion Monitoring Platform

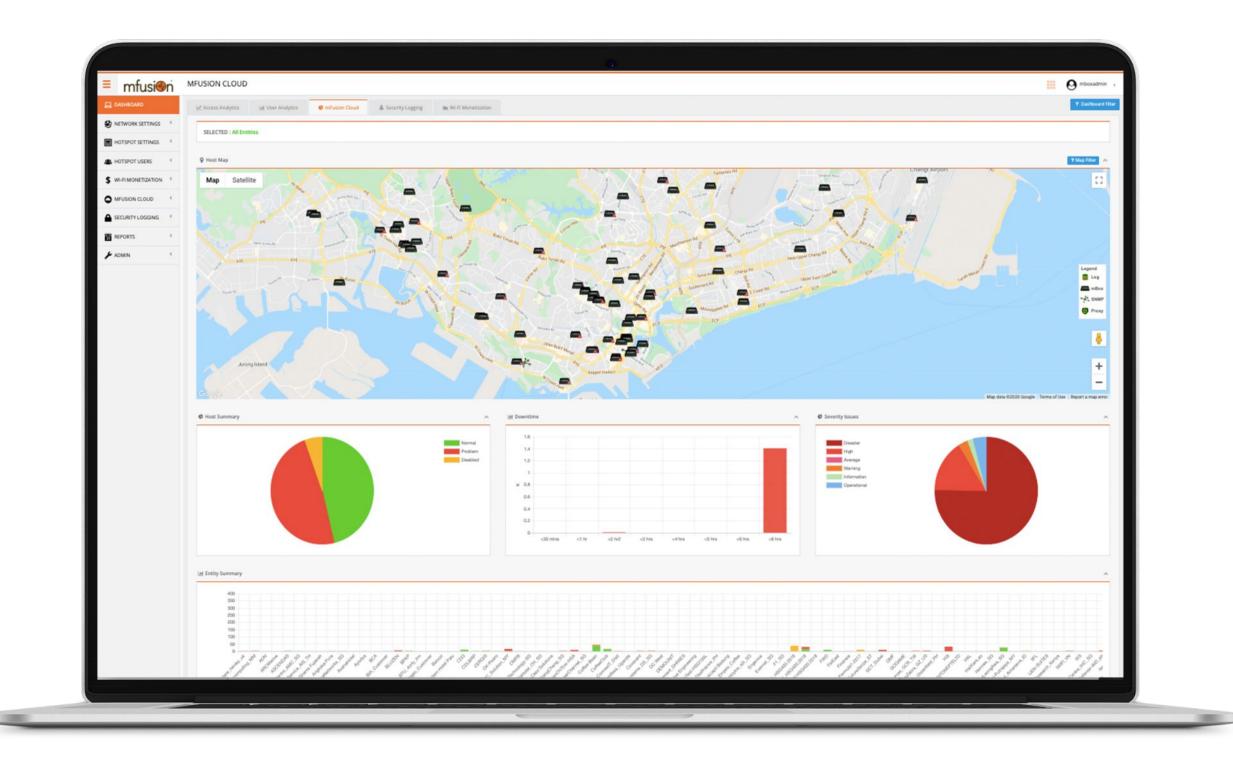

Overview

With the growing complexity between physical, virtual and cloud infrastructures, network infrastructure complicates as well. As such, businesses are finding it increasingly difficult to have a clear visibility across the entire infrastructure. Having such visibility is critical for all businesses to optimize infrastructure performance, prevent faults to maximize uptime.

mfusion is a cloud-based, enterprise IT infrastructure Monitoring and Management system, designed to provide the in-depth network visibility business needs through a secure and intuitive web-portal. From servers, routers to applications, mfusion is able to pro-actively monitor and present real-time information, reports and automated alerts or notifications based on the threshold configured.

With mfusion's in-depth intelligence and pro-active monitoring of the IT infrastructure, businesses are able to take pre-emptive measures and respond faster to potential faults that is both costly and disruptive to daily operations.

Who need mfusion?

- Providers (ISP/MSP) looking to provide Value-Added-Services to end customers
- All businesses looking to understand the health status and usage of their IT investments
- Mission-critical businesses that need immediate notifications on the uptime status of IT infrastructure

What mfusion does?

- Collects critical infrastructure information in real-time, 24x7
- Presents information in intuitive manner for easy analysis
- Provides access to critical information only to authorized personnel from anytime, anywhere
- Automated system alerts or notifications only to relevant personnel

• Quick and easy to deploy to start monitoring

- Multi-tenanted architecture to serve both MSPs and End Users
- Cost savings through OpEx only billing model

v1.0




© RansNet Singapore Pte Ltd 2022 | sales@ransnet.com





Capabilities

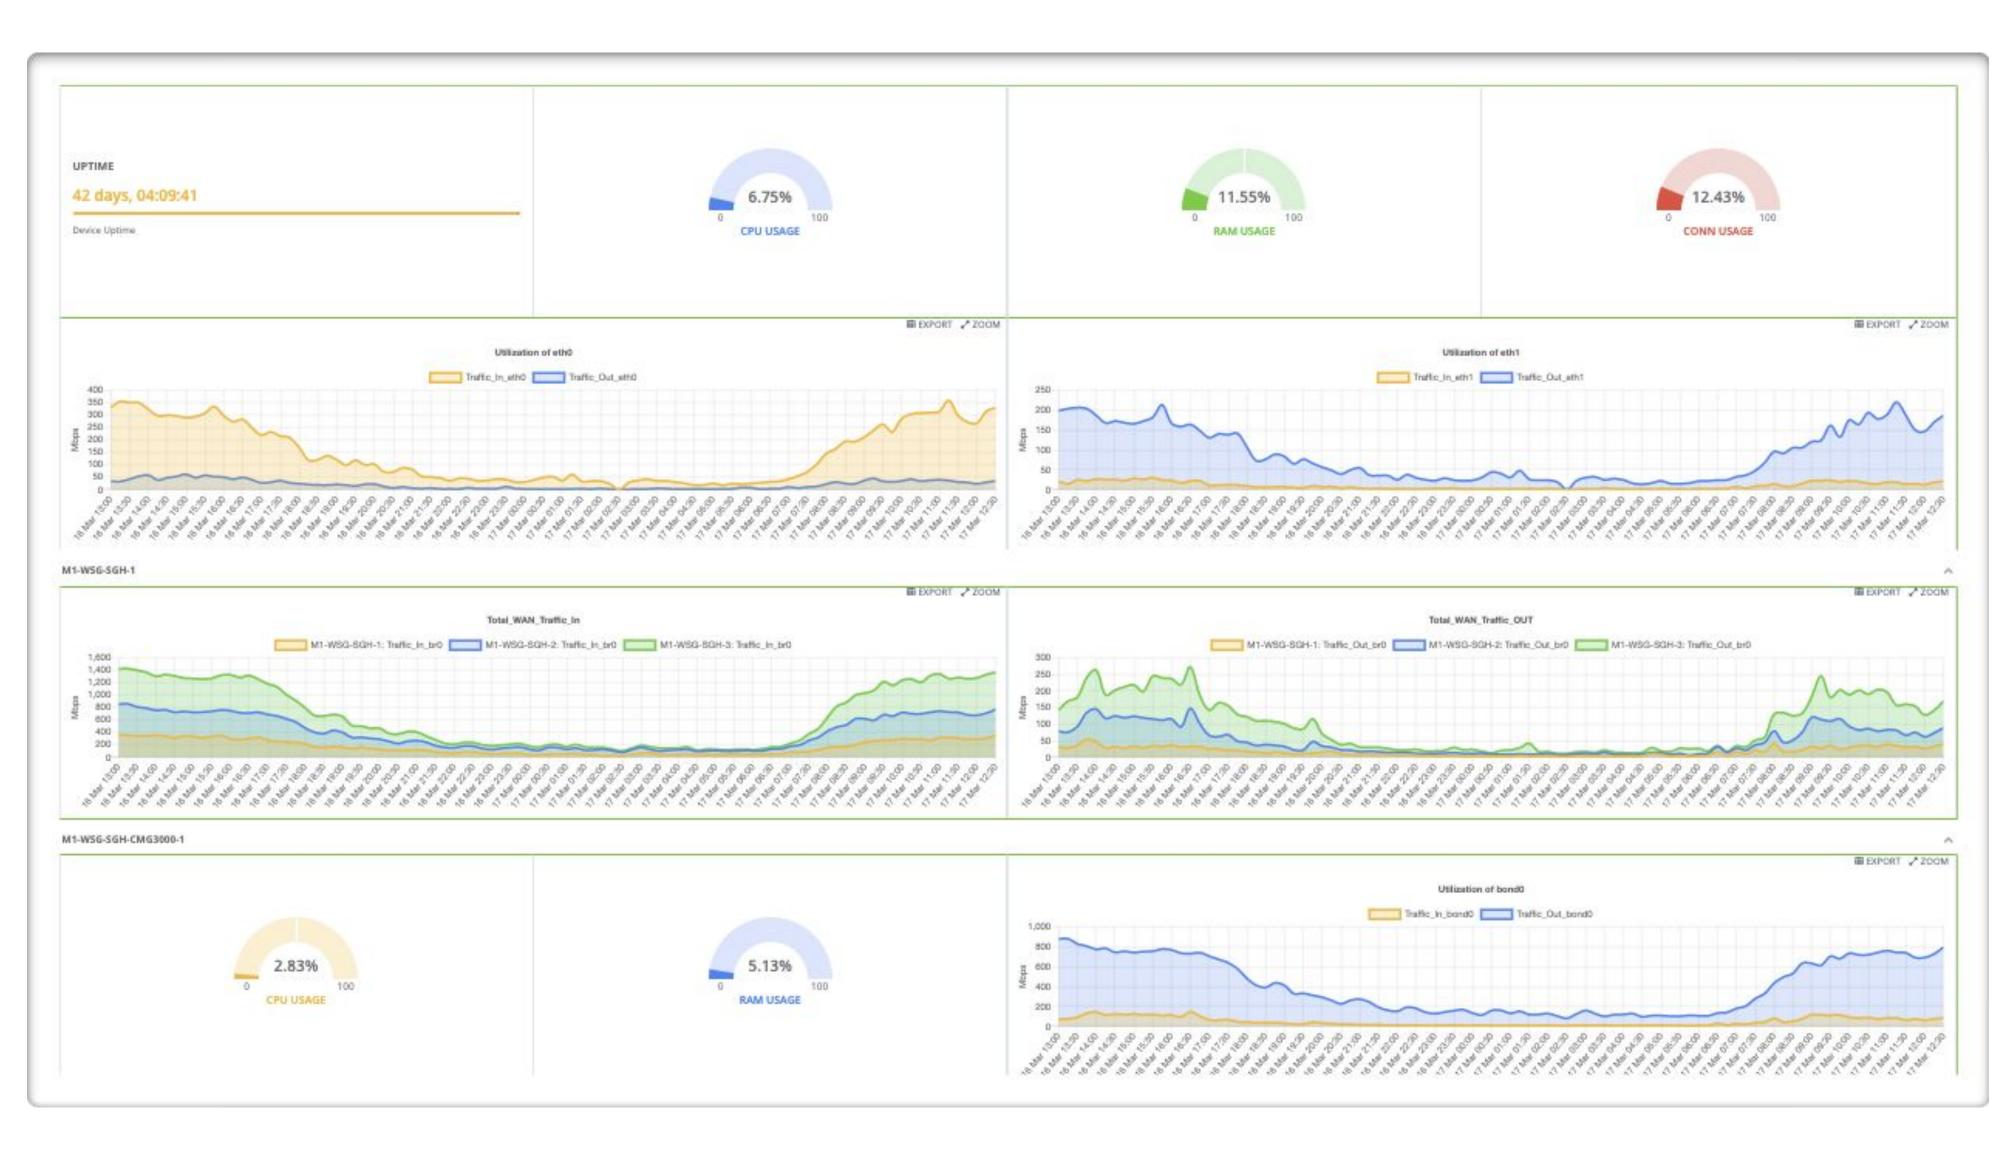

Network Monitoring

- Real-time tracking of the availability, performance and health status of network devices, and network resource utilization, such as CPU, memory, port/interface utilization, SLA, etc.
- Works on Cisco, Microsoft Windows, VMWare, Linux, and potentially any IP & SNMP based devices.

Flexible Alerting Threshold

• Extensive alerting such as status alert (up/down), threshold alert (above/below values), escalation alerts,

Net Discovery

 Agent-less discovery automatically discovers IP-based devices using SNMP or WMI across a range of IP addresses, and identifies devices components (eg. type, OS, s/n, interfaces).

Scheduled Reports

 Receive daily, weekly or monthly PDF format reports right in the convenience of your mailbox. Presented in a familiar and intuitive format as the online dashboard, administrators are able to easily determine the

and dependencies alerts (downstream suppression), via

performance of their network.

email or SMS (chargeable).



© RansNet Singapore Pte Ltd 2022 | sales@ransnet.com

mfusion Datasheet / 3



	NMS-2000	NMS-5000
erformance		
rocessor	Multi-core	Dual CPU
/lemory (RAM)	32GB	64GB
torage	1TB SSD	2TB SSD
Sigabit Interface	8 x GE	8 x GE
.0G Interface (fiber or copper)	Optional	Optional
Network and Security		
tateful Firewall & DHCP Server	\checkmark	\checkmark
tatic, Dynamic Routing (OSPF/BGP)	\checkmark	\checkmark
IAT, PAT, SNAT, DNAT, Port forwarding	\checkmark	\checkmark
PSec, GRE, SSLVPN, L2TPv3	\checkmark	\checkmark
Pv4 and IPv6 Capable	\checkmark	\checkmark
/LAN, Trunking (802.1q), Bonding	\checkmark	\checkmark
IA w/ Stateful Failover	\checkmark	\checkmark
Captive Portal Features		
andwidth Control (Static/Dynamic)	\checkmark	\checkmark
ime/Data/Session/Device Control	\checkmark	\checkmark
Vhitelist by URL/Domain/IP/MAC	\checkmark	\checkmark
ocal Authentication (RADIUS)	\checkmark	\checkmark
MS/API/payment gateway integration	\checkmark	\checkmark
Jser log and data Analytics		\checkmark
Aanagement & Monitoring		
Vireless AP management (MACC)	\checkmark	\checkmark
nfusion monitoring & management	\checkmark	\checkmark
Online Firmware Patching and Upgrade	\checkmark	\checkmark
Physical / Environmental Specs		
Dimensions (mm) (WxHxD)	430 x 44 x 450	562 x 88 x 430
Veight	6 kg	13kg
ower Consumption	< 230W	< 420W
edundant Power Supply	Optional	Included
Design Form Factor	1U rack	2U rack
Operating Temperature	0°C to 40°C	0°C to 40°C



© RansNet Singapore Pte Ltd 2022 sales@ransnet.com